



Wastebasket Pull-Out

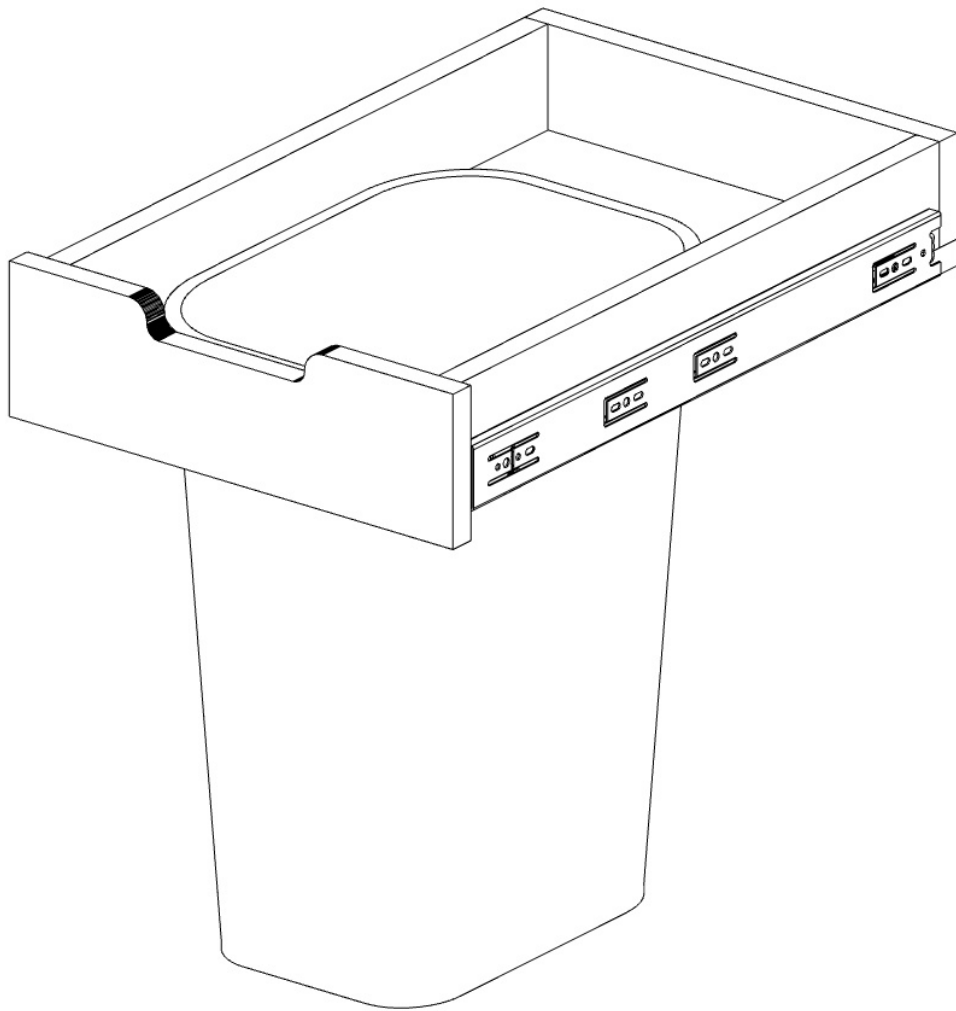

Wastebasket sold separately. Maximum wastebasket size, 35 QT.

Tools

To assemble this product you will require:

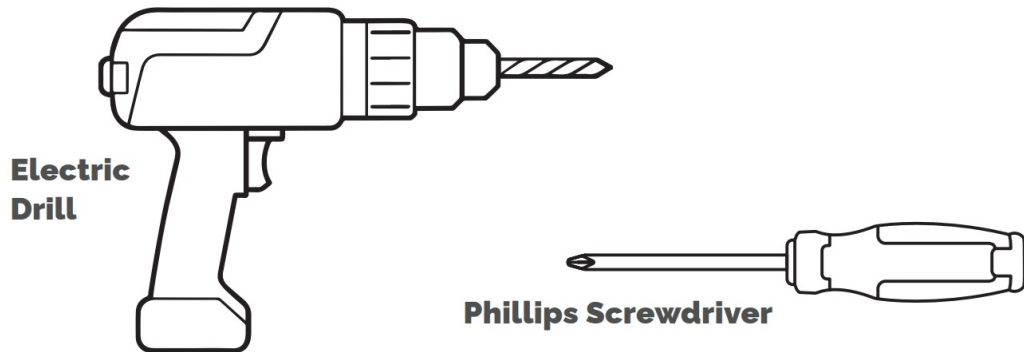


Equipment

To assemble this product you should have:



**#8 x 5/8" Stainless Steel
Phillips Flat
Head Screw**

Qty: 12




**32x25mm Drawer
Slide Spacer**

Qty: 6




5MM Euro Screw
Qty: 6

Mounting Options

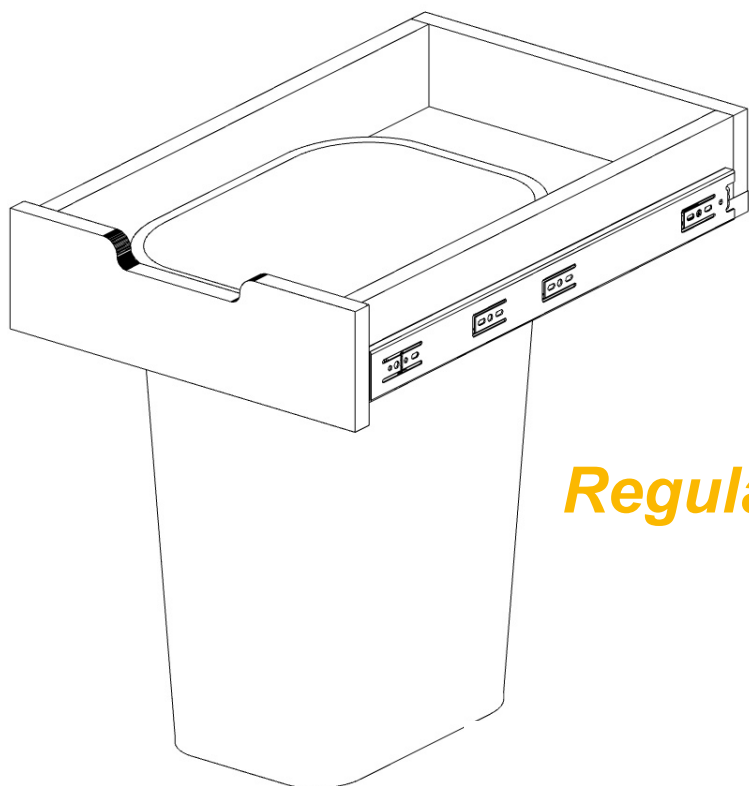


Regular

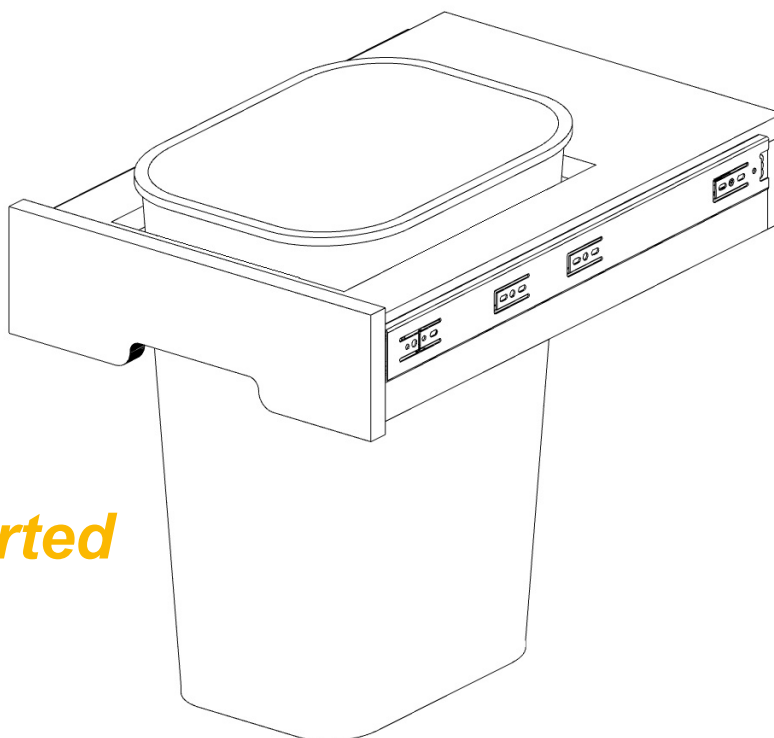

Inverted

Wastebasket sold separately. Maximum wastebasket size, 35 QT.


Mounting Locations

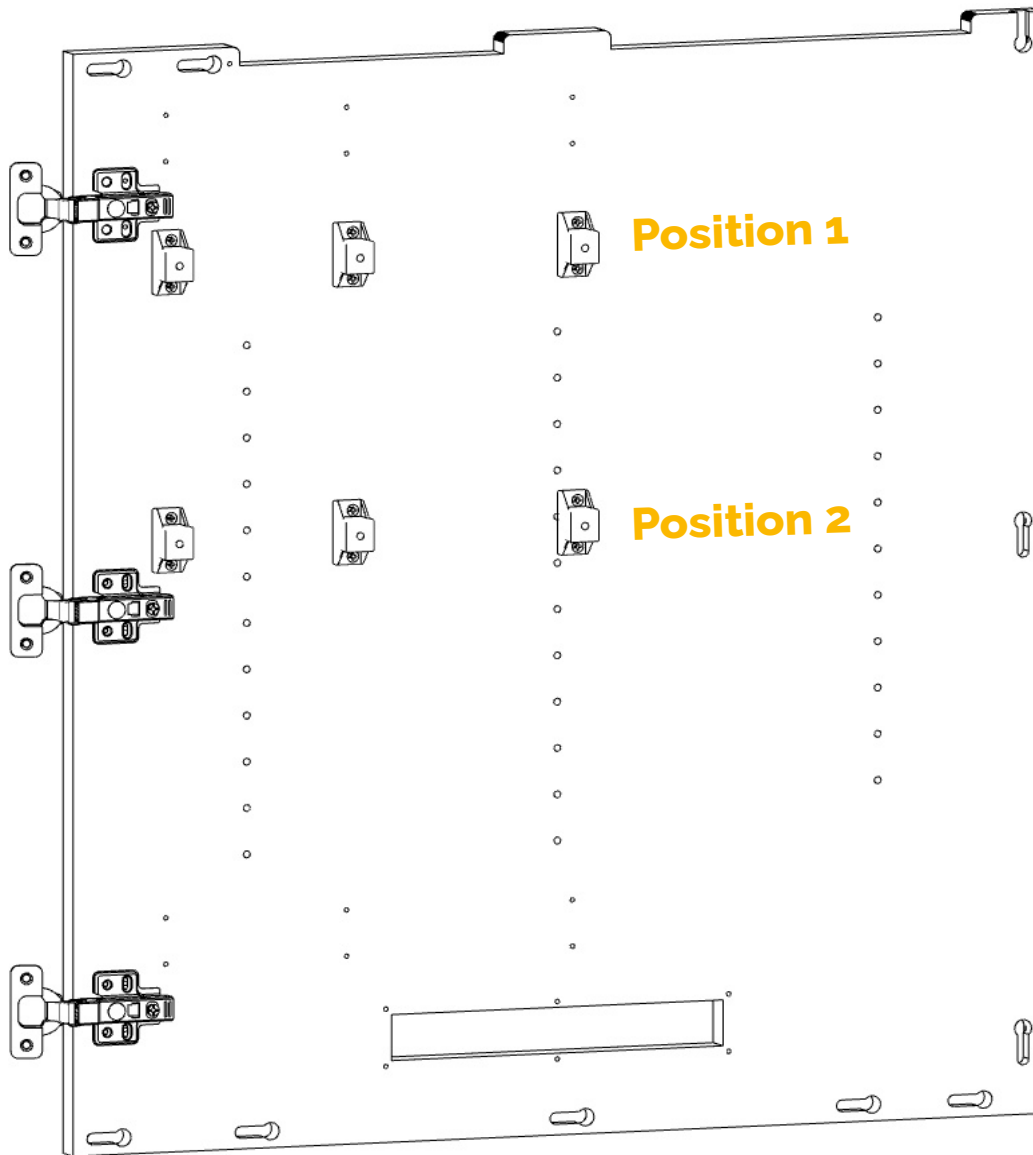

(2) #8 x 5/8"


X3

Step 1: Locate the predrilled holes on the left side panel and select the desired mounting position from the available options. Attach (3) drawer glide spacers using (2) #8 x 5/8" screws per spacer. Repeat on the right side panel.

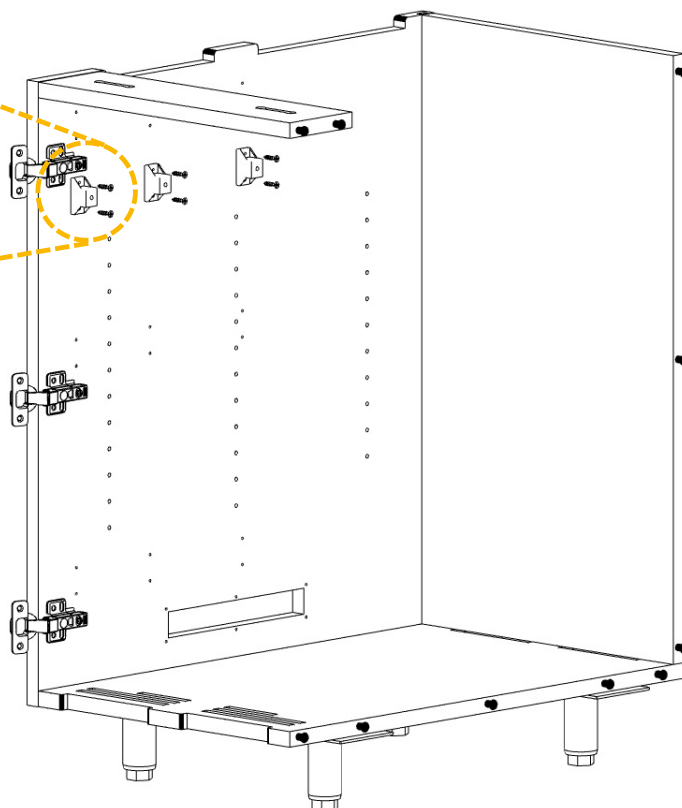


Cabinet Door and Right Side panel have been removed for illustration clarity.

Step 2: Separate the cabinet rail from the drawer box rail by pushing the release clip.

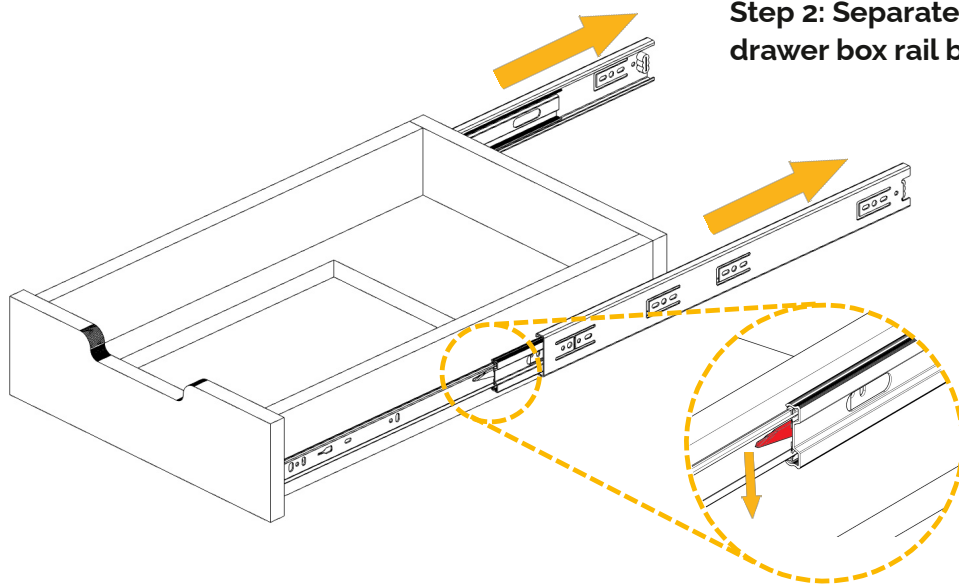

WASTEBASKET PULL-OUT

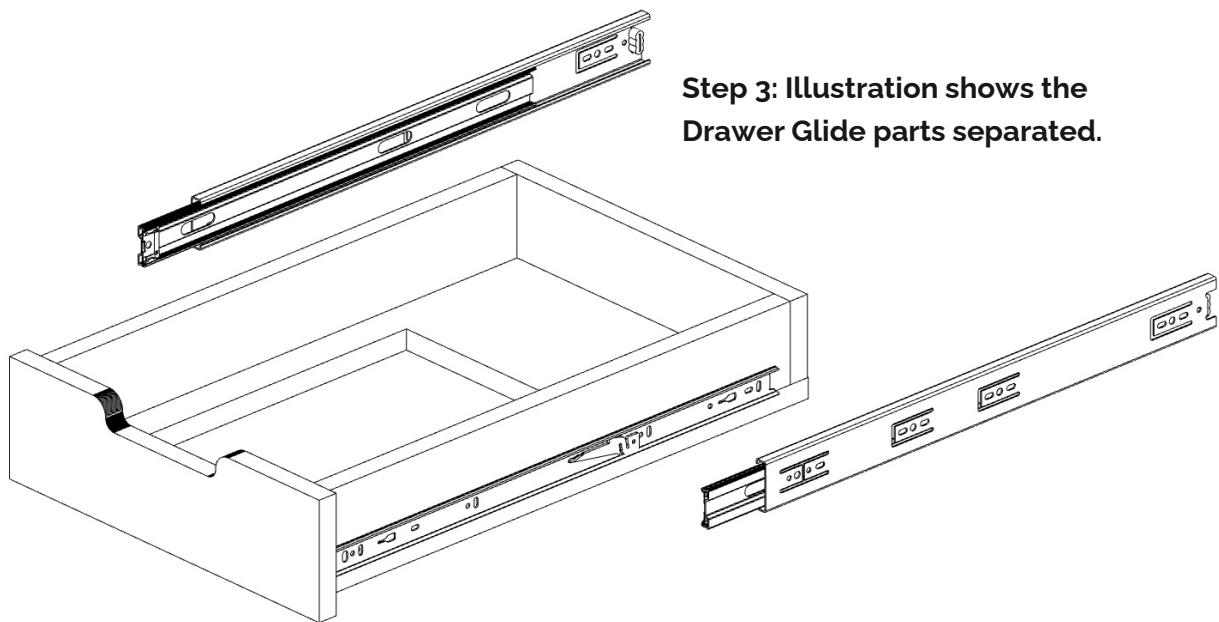


Step 3: Illustration shows the Drawer Glide parts separated.




Cabinet Door and Side panel have been removed for illustration clarity.


Step 4: Fully extend the Cabinet Box Rail and attach it to the Drawer Glide Spacers on the left Side Panel using (3) 5 mm Euro screws, as shown. Repeat on the Right Side Panel.

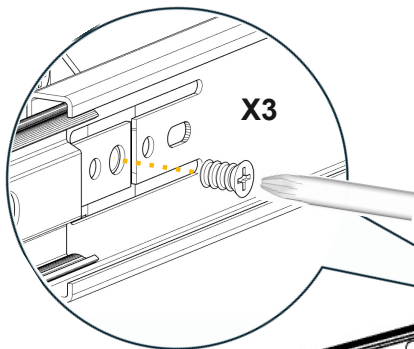

(1) 5mm Euro Screw

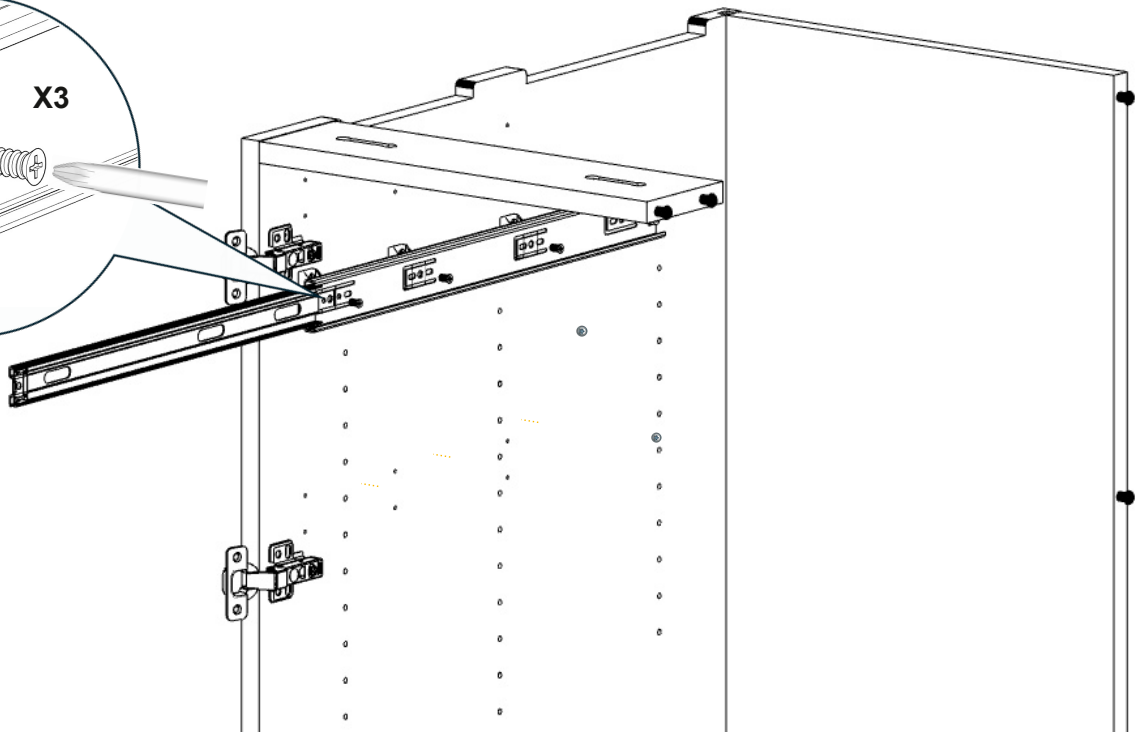


Step 5: Align the Drawer Rails with the Cabinet Rails, then slide the Wastebasket accessory into place.

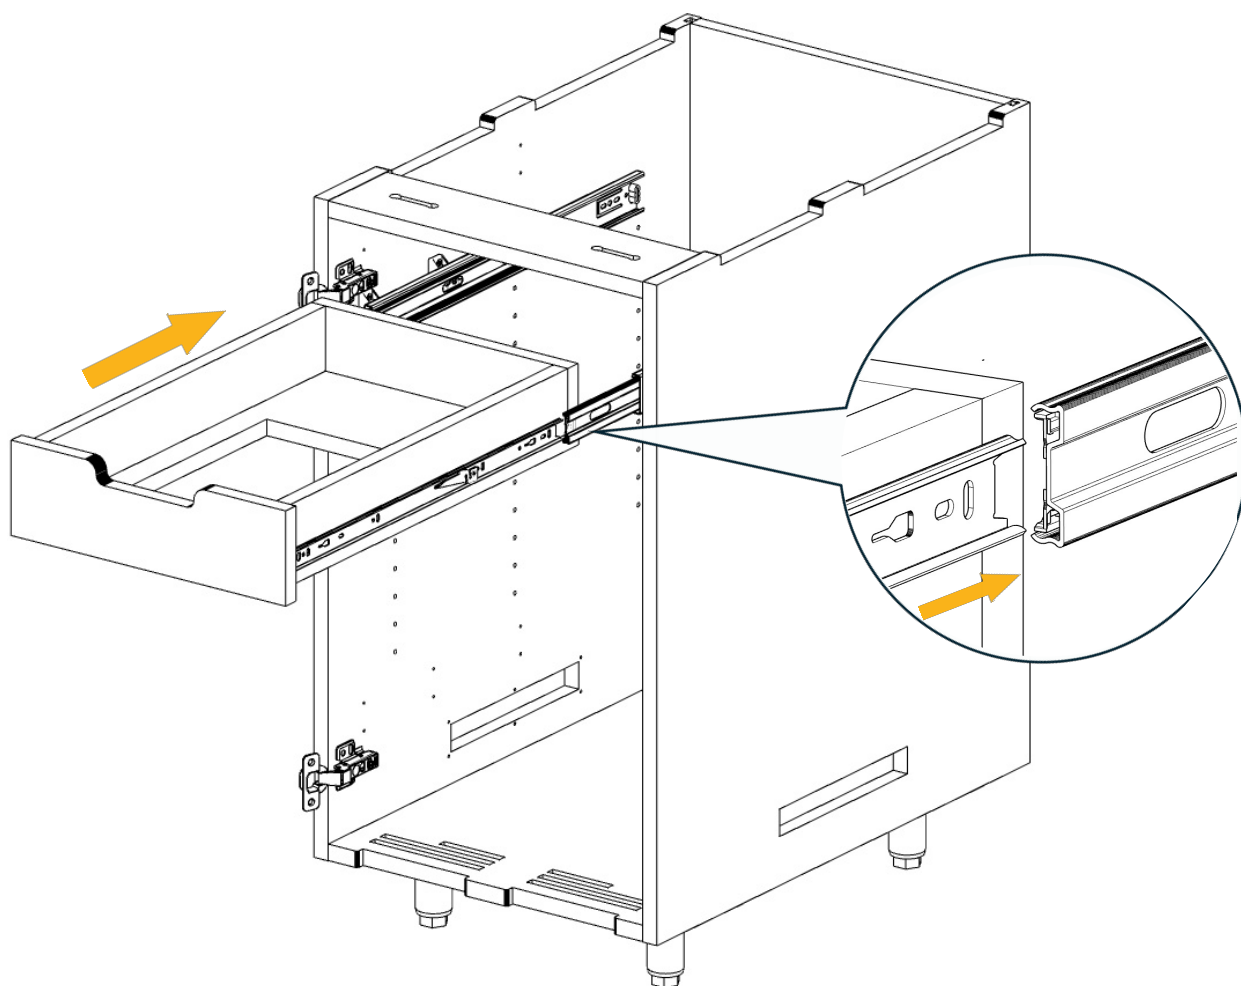



Finished Product Mounting Position 1

Regular

Inverted

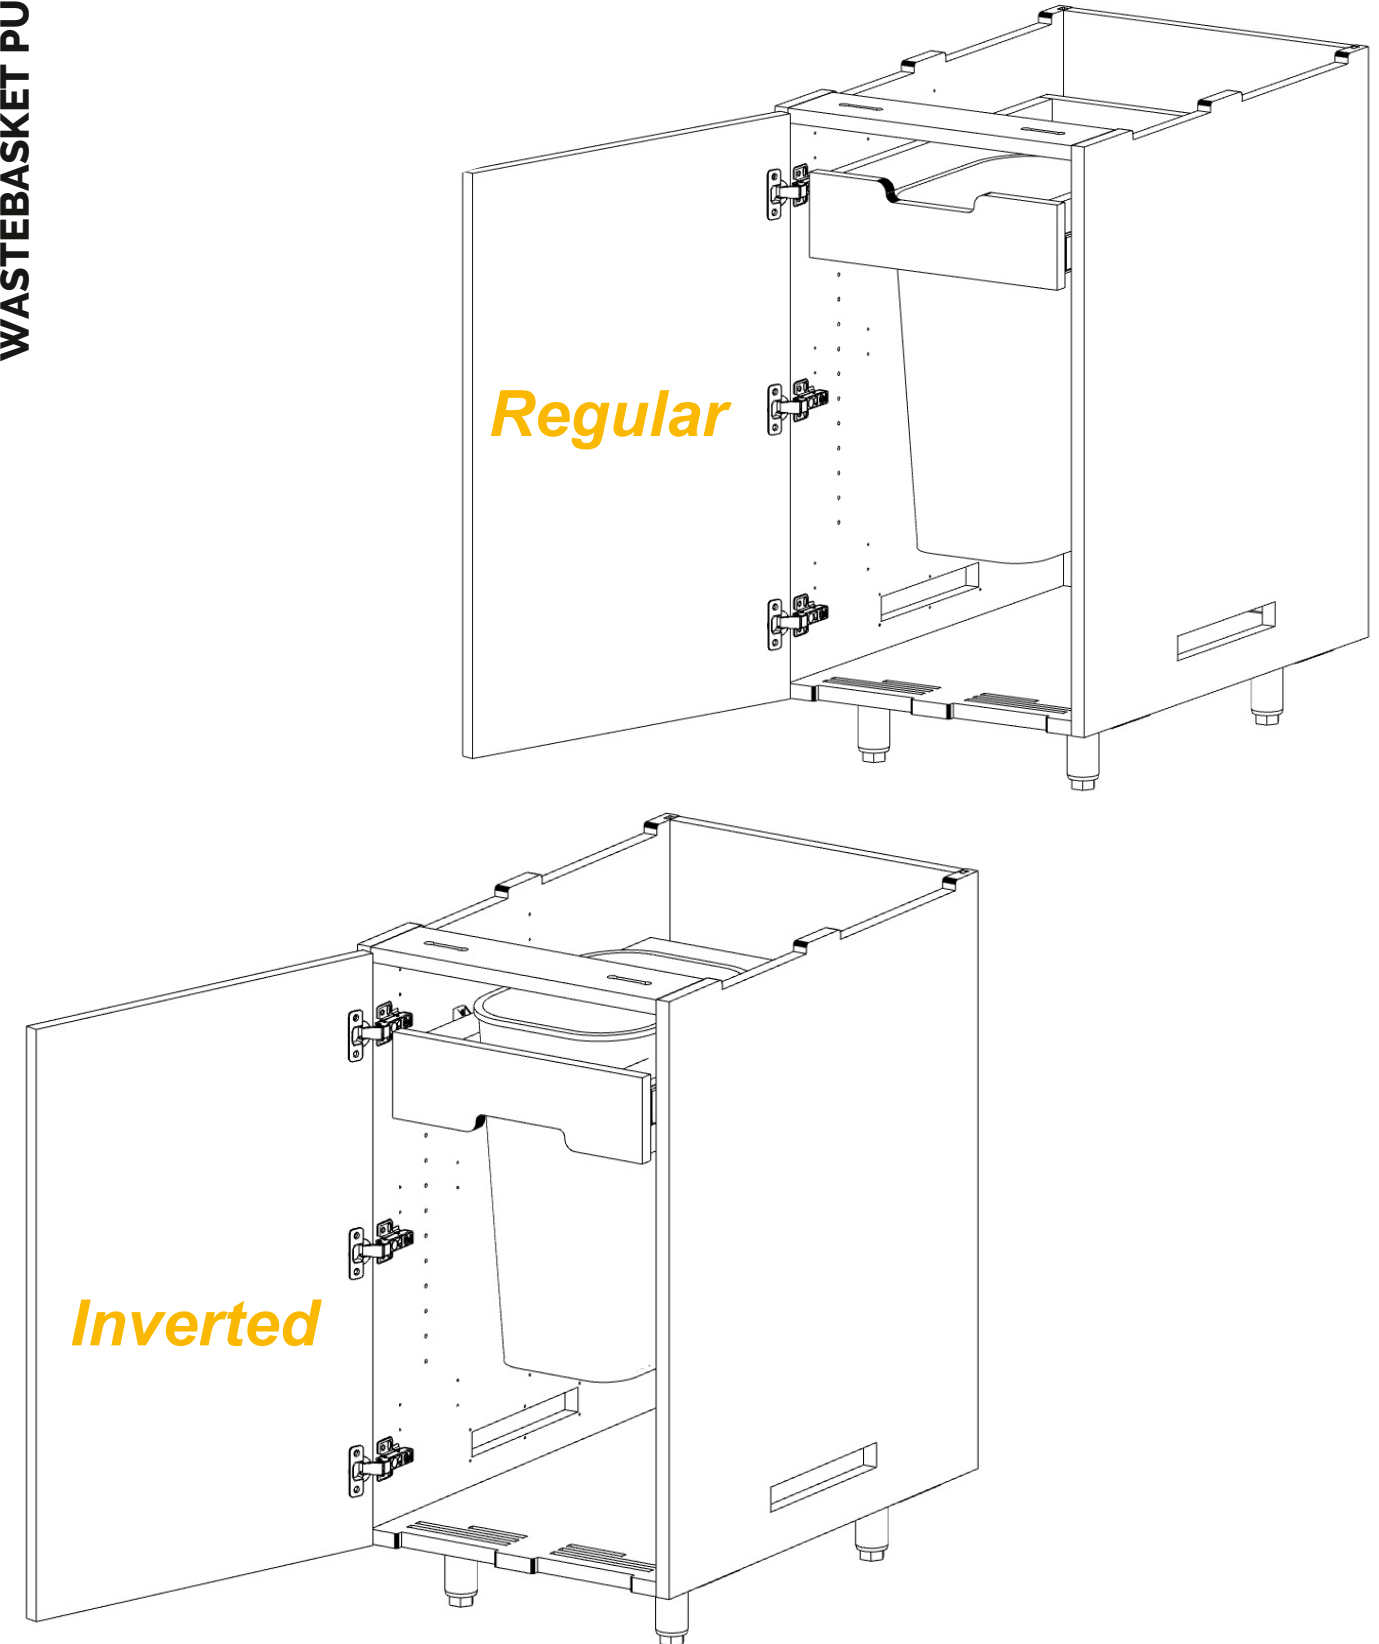

Finished Product Mounting Position 2

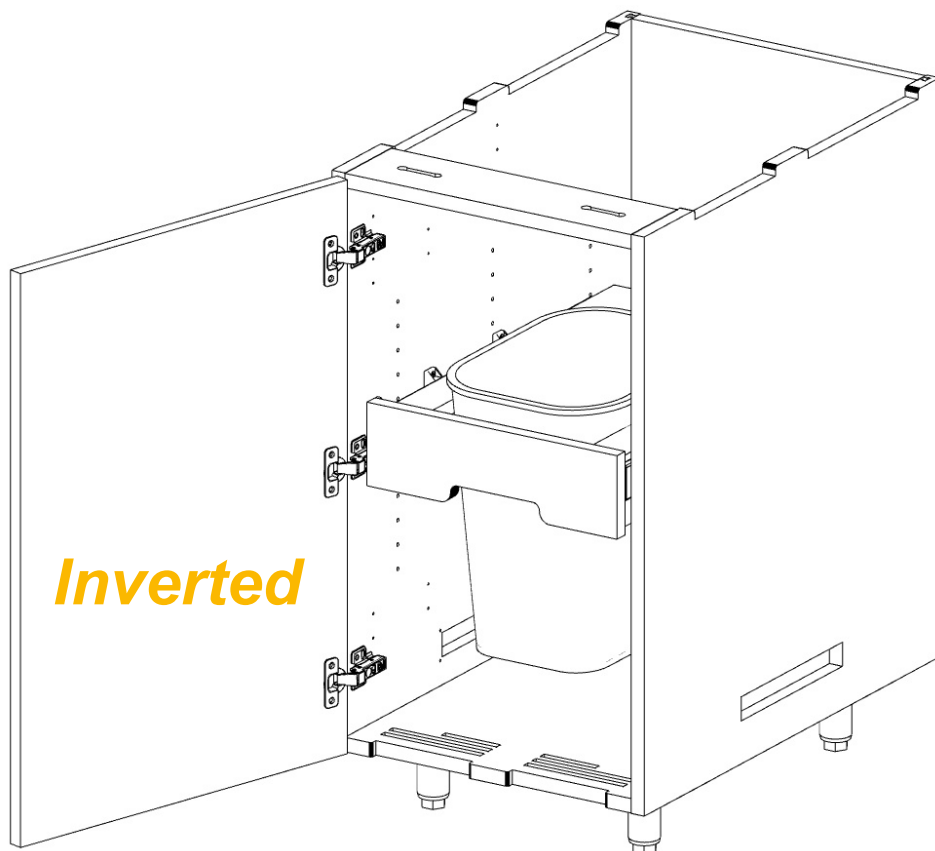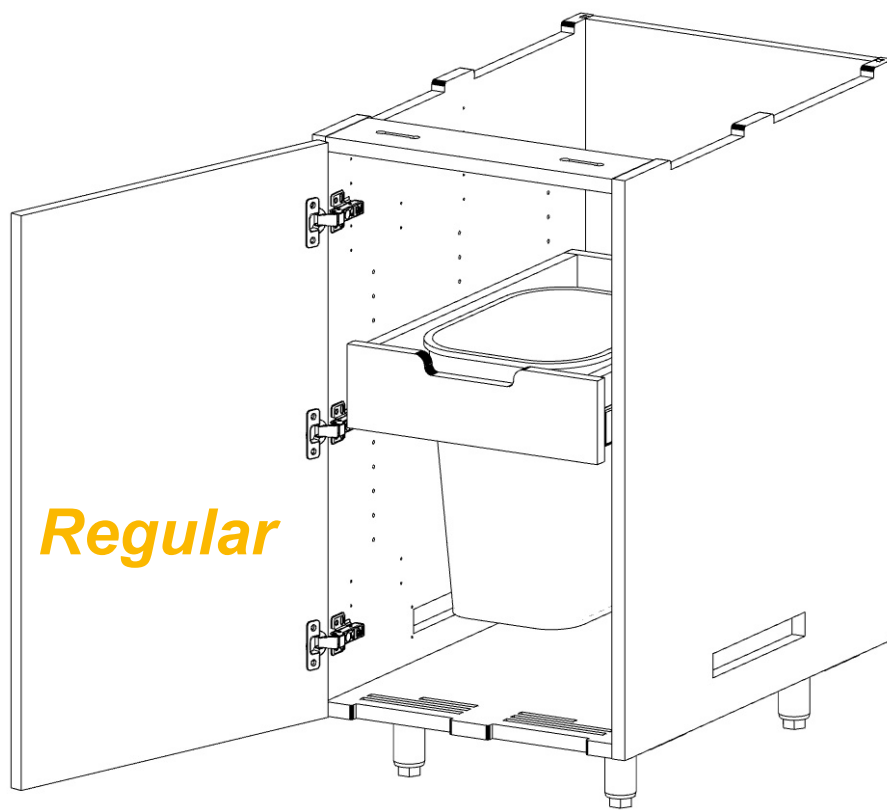

WASTEBASKET PULL-OUT